

RELAX STYLE



height 653 mm, length 928 mm, Matt White finish (cod. J8). Designed by Dario Tanfoglio di Beta Engineering

Relax STYLE is the ventilated radiator that heats and furnishes.

The design, characterized by soft and harmonious lines, hides the hydraulic and electrical connections in a depth of 110 mm.

The replacement of the old cast iron or aluminum

radiator takes place, therefore, without masonry work with a radiator with a unique geometry.

Relax STYLE guarantees an exclusive and contemporary design with high performance at maximum silence.

**Hidden hydraulic connection
INCLUDED IN THE PRICE**

The ventilated radiator that HEATS and FURNISHES.

The radiant section combined with the ventilated section enables maximum **energy efficiency** by combining high performance with **low temperatures**.

Technological research based on the latest innovations developed in the field of heating has made it possible to achieve high performance while ensuring maximum **acoustic comfort**.

Connections and center distances

Side centre distances


from 400 to 1600 mm

Bottom centre distances

from 50 to 700 mm

Completely concealed connections.

Ideal for low temperature operation.

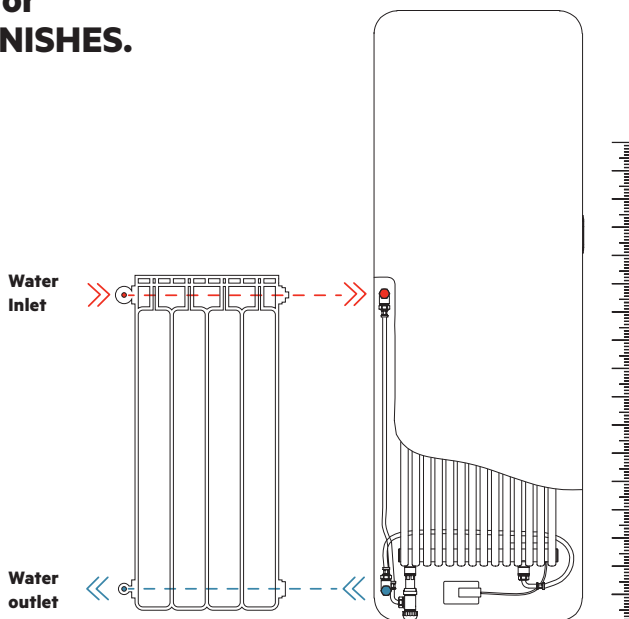

24



EN16430-2 **UNI EN ISO 3744:2010**

									Thermal Power *					
Model	Depth	Height	Width	C. centre	Weight	Cap.	Watt ΔT=50°C			Watt ΔT=30°C				
	mm	H mm	L mm	L' mm	Kg	ltr	Vel. 0	Vel. 1	Vel. 2	Vel. 3	Vel. 0	Vel. 1	Vel. 2	Vel. 3
653 x 712	91	653	712	(*)	24,6	4,2	533	940	1048	1234	280	571	637	750
653 x 928	91	653	928	(*)	31,5	5,7	704	1339	1492	1754	367	799	890	1047
653 x 1144	91	653	1144	(*)	38,9	7,2	875	1634	1819	2135	453	993	1105	1298
653 x 1360	91	653	1360	(*)	46,0	8,7	1024	1913	2131	2506	530	1120	1248	1467
653 x 1522	91	653	1522	(*)	51,2	9,9	1136	2132	2374	2792	588	1248	1390	1634
783 x 928	91	783	928	(*)	39,0	7,2	821	1450	1621	1914	425	846	946	1117
783 x 1144	91	783	1144	(*)	47,6	9,1	1012	1788	1998	2360	523	1043	1166	1377
783 x 1360	91	783	1360	(*)	56,3	11,0	1204	2126	2375	2805	622	1240	1386	1637
783 x 1522	91	783	1522	(*)	62,8	13,0	1347	2379	2658	3139	697	1388	1551	1832
933 x 496	91	933	496	(*)	26,5	4,2	480	751	826	949	250	443	487	559
933 x 604	91	933	604	(*)	31,7	5,4	584	914	1004	1155	304	539	592	681
1453 x 496	91	1453	496	(*)	40,0	7,0	802	1053	1141	1289	421	602	652	737
1453 x 604	91	1453	604	(*)	48,1	9,0	976	1282	1390	1569	512	733	794	897
1753 x 496	91	1753	496	(*)	48,0	8,7	949	1178	1271	1424	493	666	719	805
1753 x 604	91	1753	604	(*)	57,7	11,2	1155	1434	1548	1734	600	811	875	981
1753 x 712	91	1753	712	(*)	67,1	13,6	1362	1691	1824	2044	708	956	1032	1150

* Heating performance certified according to UNI EN16430-2:2015


(*) = SEE INSTRUCTIONS ON NEXT PAGE

- Maximum working pressure 10 bar
- Maximum working temperature 95°C

Finishes available: see pag. 326.

RELAX STYLE

Right or left side connection

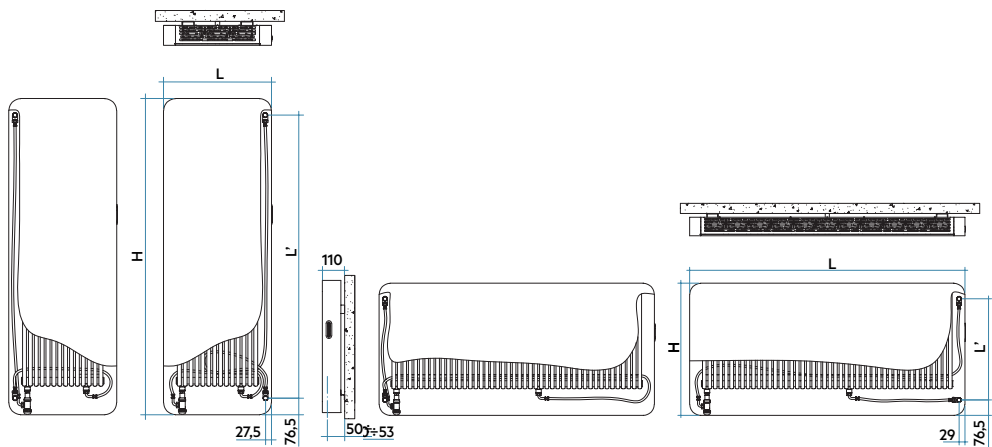


Centre distances available with left or right side connection

			Centre distances available divided according the height				
Model	Height	Width	from 400 mm to 500 mm	from 501 mm to 650 mm	from 651 mm to 800 mm	from 801 mm to 1300 mm	from 1301 mm to 1600 mm
	H mm	L mm	Code	Code	Code	Code	Code
653 x 712	653	712	L1	X	X	X	X
653 x 928	653	928	L1	X	X	X	X
653 x 1144	653	1144	L1	X	X	X	X
653 x 1360	653	1360	L1	X	X	X	X
653 x 1522	653	1522	L1	X	X	X	X
783 x 928	783	928	L1	L2	X	X	X
783 x 1144	783	1144	L1	L2	X	X	X
783 x 1360	783	1360	L1	L2	X	X	X
783 x 1522	783	1522	L1	L2	X	X	X
933 x 496	933	496	L1	L2	L3	X	X
933 x 604	933	604	L1	L2	L3	X	X
1453 x 496	1453	496	L1	L2	L3	L4	X
1453 x 604	1453	604	L1	L2	L3	L4	X
1753 x 496	1753	496	L1	L2	L3	L4	L5
1753 x 604	1753	604	L1	L2	L3	L4	L5
1753 x 712	1753	712	L1	L2	L3	L4	L5

✓ = Conn. centre available - X = Conn. centre not available

RELAX STYLE

Bottom connection

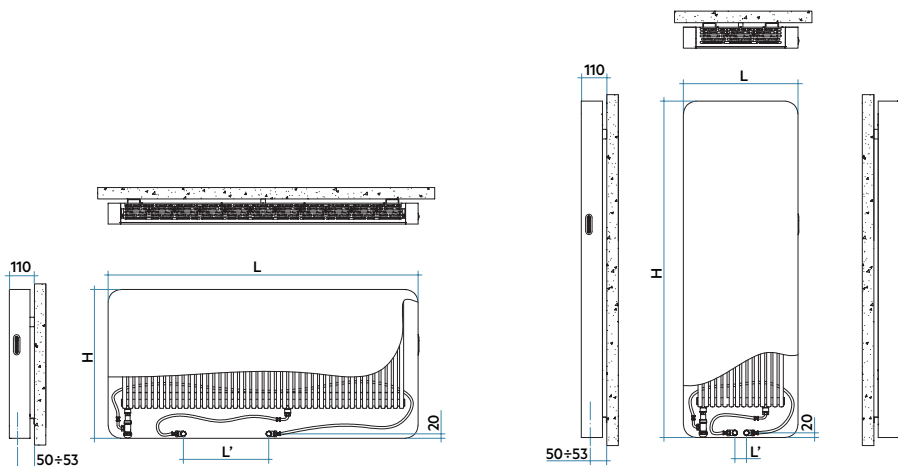

Centre distances available with connection from below

			Interassi per sostituzioni dal basso				
Model	Height	Width	from 50 mm to 200 mm	from 201 mm to 320 mm	from 321 mm to 450 mm	from 451 mm to 500 mm	from 501 mm to 700 mm
	H mm	L mm	Code	Code	Code	Code	Code
653 x 712	653	712	S1	S2	S3	X	X
653 x 928	653	928	S1	S2	S3	S4	X
653 x 1144	653	1144	S1	S2	S3	S4	S5
653 x 1360	653	1360	S1	S2	S3	S4	S5
653 x 1522	653	1522	S1	S2	S3	S4	S5
783 x 928	783	928	S1	S2	S3	S4	X
783 x 1144	783	1144	S1	S2	S3	S4	S5
783 x 1360	783	1360	S1	S2	S3	S4	S5
783 x 1522	783	1522	S1	S2	S3	S4	S5
933 x 496	933	496	S1	X	X	X	X
933 x 604	933	604	S1	S2	X	X	X
1453 x 496	1453	496	S1	X	X	X	X
1453 x 604	1453	604	S1	S2	X	X	X
1753 x 496	1753	496	S1	X	X	X	X
1753 x 604	1753	604	S1	S2	X	X	X
1753 x 712	1753	712	S1	S2	S3	X	X

✓ = Conn. centre available - X = Conn. centre not available