

RELAX HYBRID

Vertical




RELAX HYBRID is available in vertical and horizontal versions in four models with different heat and cold powers. It is offered in six colors combined with a Medium Grey frame perfect for creating tone on tone but also harmony or contrast with the color of the

radiant plate. It can be equipped with a LED lighting system that enhances its elegant profile and creates a suggestive mood in the environment.

RELAX HYBRID

Vertical

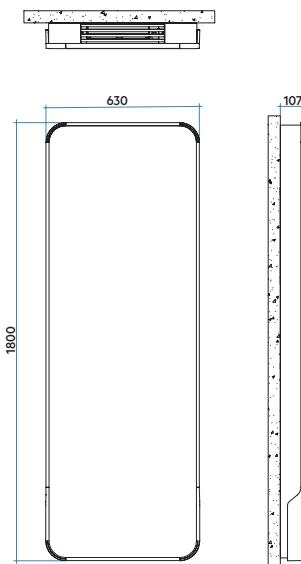

UNI EN ISO 3744:2010

HEATING PERFORMANCE *		1800 x 630		
(75°/65°C a 20°C)	U.M.	NIGHT	AUTO	BOOST
Heating power	W	1636	2758	3093
Water flow rate	l/h	141	237	266
Pressure drops	kPa	5,9	13,0	15,4
(55°/45°C a 20°C)		NIGHT	AUTO	BOOST
Heating power	W	963	1623	1820
Water flow rate	l/h	83	140	156
Pressure drops	kPa	2,7	5,9	7,0
COOLING PERFORMANCE *		NIGHT	AUTO	BOOST
(27°/22°C a 27°C)				
Total power in cooling	W	367	686	820
Sensible power in cooling	W	283	528	631
Water flow rate	l/h	63	118	141
Pressure drops	kPa	1,5	4,2	5,6

• Maximum working pressure 4 bar

• Maximum working temperature 95°C

RELAX HYBRID FINISHES



AGAVE
Cod. 9N



MATT LIGHT GREY
Cod. 8N



MEDIUM GREY
Cod. 4D



MATT WHITE
Cod. J8



SABLÉ
Cod. Y4



SATIN BLACK
Cod. 30